

# BISTAR

TP8F 66M  
TP8F 66M(H) **132-cell**

650 - 670W


12BB      PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12      25

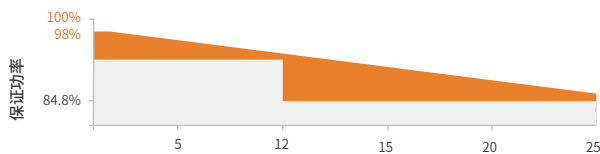

12BB

2%      0.55%



2%



PID  
PID  
85 /85% RH 192





IP68

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	650	492	655	495	660	499	665	503	670	507
	37.8	35.4	38.0	35.6	38.2	35.8	38.4	36.0	38.6	36.1
	17.20	13.88	17.24	13.91	17.28	13.95	17.32	13.99	17.36	14.02
	45.4	42.9	45.6	43.1	45.8	43.3	46.0	43.5	46.2	43.7
	18.29	14.74	18.33	14.77	18.37	14.81	18.41	14.84	18.45	14.87
	20.90		21.10		21.30		21.40		21.60	

	12BB
	132 (6*22)
	2384*1303*35mm (93.86*51.30*1.38 )
	34.5kg (76.06lbs.)
	3.2mm
	IP68, 3
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	1000V/1500V/DC
	-40°C~+85°C
	30A
	Class

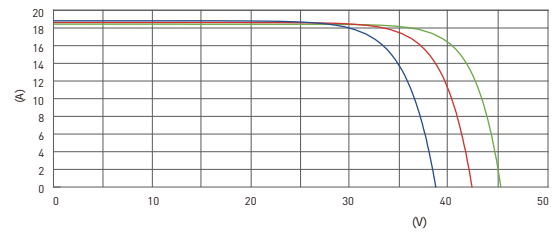

	31	31(USA)
	527	527

