



FEATHER

TP7F54M
TP7F54M(H) **108-cell**

395 - 415W

10BB Half-cut Mono Perc
Light-weight



SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY

12 Years
Quality Assurance

2 Years
Power Output Guarantee

Linear Performance Warranty

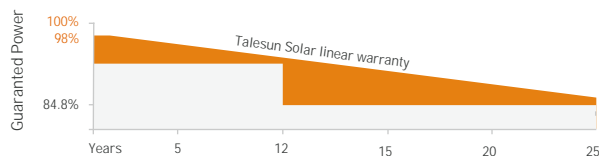

KEY FEATURES



Light-Weight

Reduce roof loads, easy operation, lower installation cost



10BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss
Ga doped wafer, attenuation <2% (1st year) / 0.55% (Linear)



Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



IP68 Junction Box

High waterproof level

TEMPERATURE CHARACTERISTICS

	-0.35%/°C
	-0.26%/°C
	+0.048%/°C
	43±2°C

PACKING CONFIGURATION

	36	36(USA)
	936	936



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to product enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the project.