



# FEATHER

TP7F54M  
TP7F54M(H) **108-cell**

**395 - 415W**

10BB PERC



## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



## 质量保证

12

25

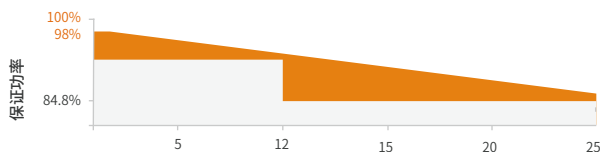

## 产品特性



重量更轻



10BB半片电池技术

2%

0.55%



显著降低热斑风险



优秀的抗PID性能

PID  
85 / 85% RH 192



IP68接线盒

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	395	294	400	298	405	302	410	306	415	310
	30.85	28.8	31.05	29.0	31.24	29.2	31.43	29.3	31.64	29.5
	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42	13.13	10.5
	36.75	34.6	37.00	34.8	37.25	35.1	37.50	35.3	37.75	35.5
	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24	14.02	11.3
	20.20		20.50		20.70		21.00		21.30	

	10BB
	108 (6*18)
	1722*1134*30mm (67.80*44.65*1.18 )
	16.2kg (35.72lbs.)
	2.0mm
	IP68, 3 Bypass Diodes
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class

	36	36(USA)
	936	936

