



# BIPRO

FD6160M **120-cell**

360 - 380l

9BB


PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 30

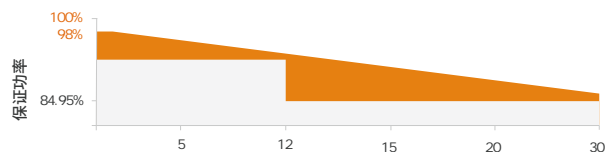

9BB

2%

0.45%



5%-25%



PID

PID  
85 / 85% RH 192



IP68

(P<sub>Sj</sub> / I )

(H<sub>bb</sub>/H)

(I<sub>bb</sub>/A)

(HaU/H)

(IeU/A)

(%)

OF( )

( 375W

(P<sub>Sj</sub> / I )

(H<sub>bb</sub>/H)

(I<sub>bb</sub>/A)

(HaU/H)

(IeU/A)

25%

469

35.2

12.79


13.33

41.3

41.3

13.57

14.14

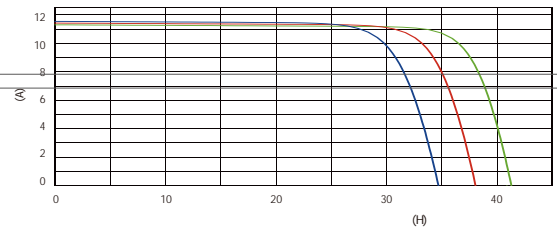

1500H/DC

-40, Cp+85, C

25A

C:See

5400PS

2400PS

70% f 5%

-0.36% /, C

-0.26% /, C

+0.043% /, C

43f 2, C

1038.0±2.0

30.0

36

36(GEA)

936

792

