




BISTAR

TP6L72M
TP6L72M(H) **144-cell**

435 - 455W


9BB PERC

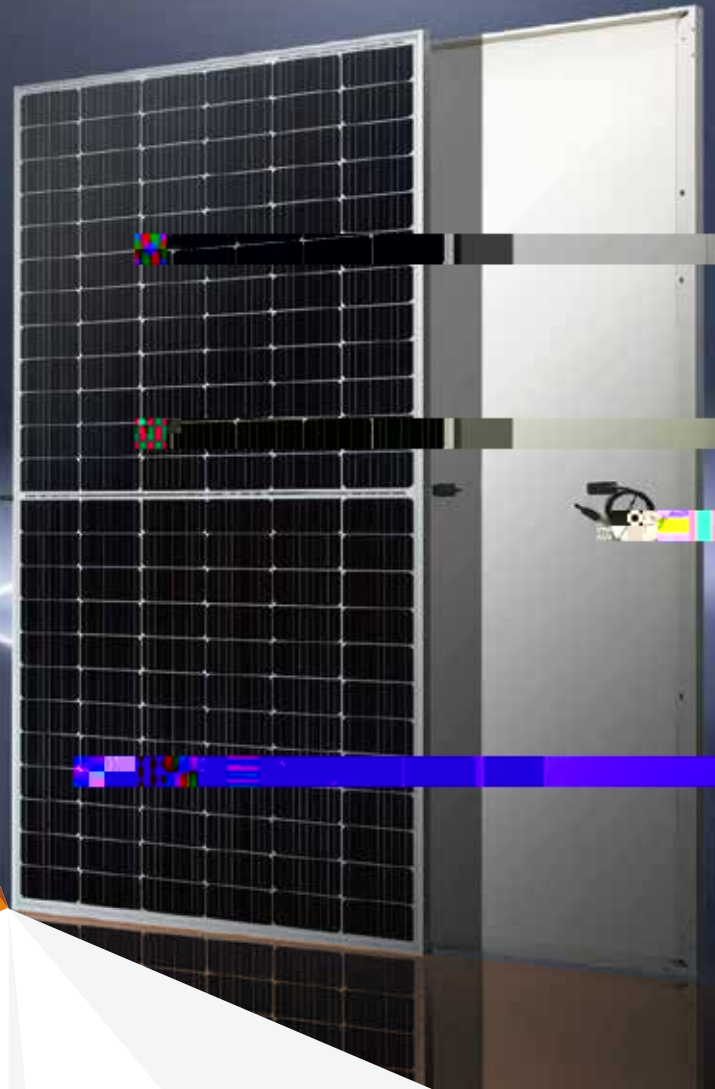

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 25

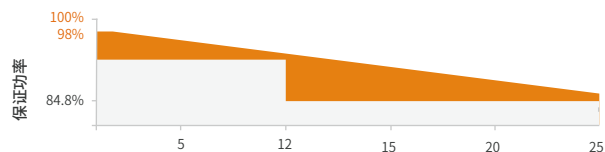

9BB

2% 0.55%



PID

PID
85 /85% RH 192



IP68



0 0 5

| | STC | NMOT | STC | NMOT % | STC | NMOT | STC | S NMOT | STC | NMOT | S |
|--|-------|------|-------|--------|-------|------|-------|--------|-------|------|---|
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | 20.00 | | 20.20 | | 20.40 | | 20.70 | | 20.90 | | |

| | |
|--|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

| | |
|--|----------------|
| | 1000V/1500V/DC |
| | -40°C~+85°C |
| | 20A |
| | Class |
| | |
| | |

| | | |
|--|-----|---------|
| | 31 | 31(USA) |
| | 715 | 682 |

