




# BIPRO

TM7G54M **108-cell**

420 - 440W

Bifacial Dual Glass

16BB Half-cut N-type

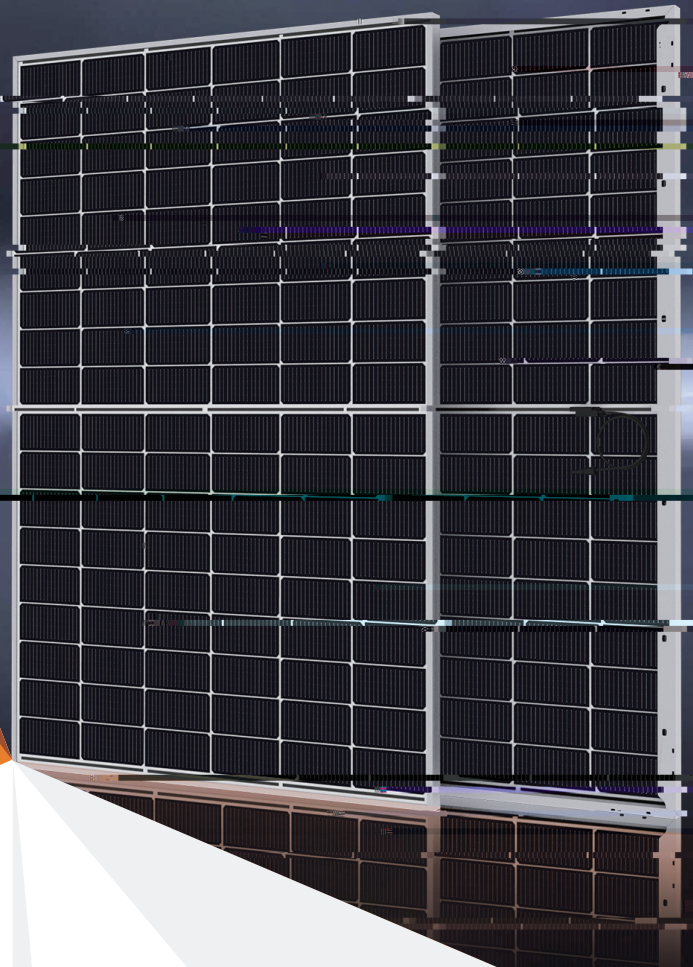

## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



## PERFORMANCE WARRANTY

Guaranteed Power

## KEY FEATURES



### 16BB Half-cut Cell Technology

Lower LID/LeTID degradation and better low light performance  
Attenuation  $\leq 1\%$  (1st year) /  $\leq 0.4\%$  (Linear)



### Industry Leading High Yield

Bifacial TOPCon cell technology,  
Dual-sided power generation gain from back side depending on  
albedo, significantly reduce LCOE



### Excellent Anti-PID Performance

192 hours Anti-PID test



### Wider Application

No water-permeability and high wear-resistance,  
can be widely used in high-humid, windy and dusty area



### IP68 Junction Box

High waterproof level

**ELECTRICAL CHAR**

Testing Condition
Maximum P
Operat
On

P  
Piec

