


# IPR

TM7G78M #1 (ZUN)

615 - 635W

16BB N

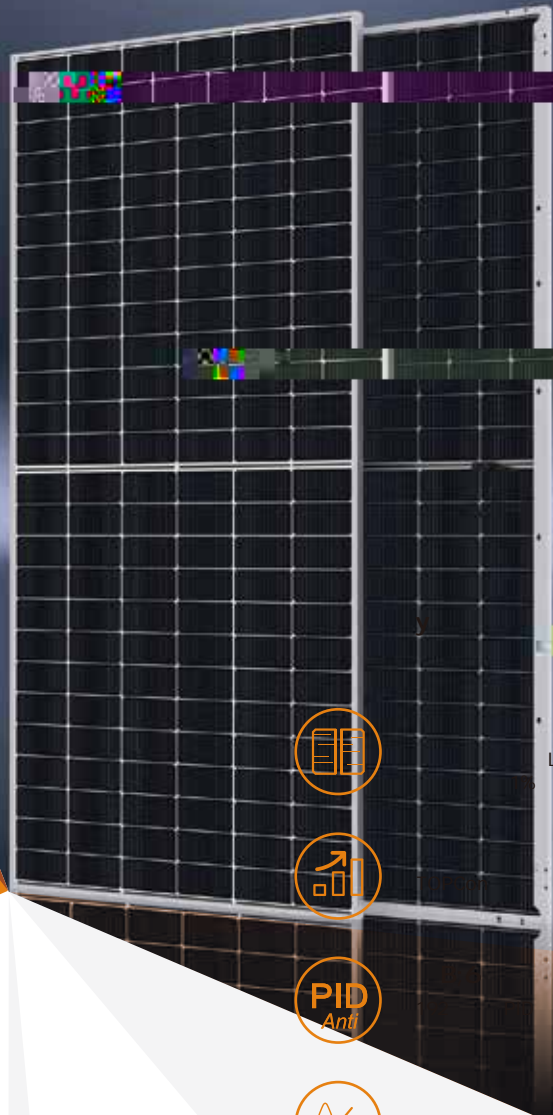

LID/LeTID 0.4%

LCOE

2400Pa 5400Pa




- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



# \$

%

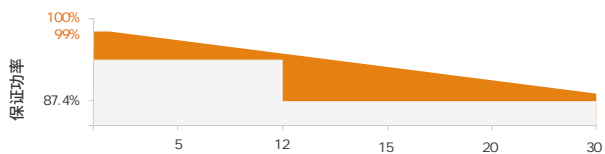

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
(Pmax/W)	615	465	620	469	625	473	630	476	635	480
(Vmpp/V)	47.24	44.30	47.42	44.50	47.61	44.70	47.80	44.80	47.97	45.00
(Impp/A)	13.02	10.50	13.08	10.54	13.13	10.58	13.18	10.62	13.24	10.66
(Voc/V)	55.79	52.70	55.99	52.90	56.18	53.10	56.37	53.30	56.55	53.50
(Isc/A)	13.69	11.04	13.74	11.08	13.79	11.12	13.84	11.16	13.89	11.20
(%)	22.00		22.20		22.40		22.50		22.72	

STC : 1000W/m<sup>2</sup>, AM1.5, 25 °C, 0~+5W ± 3%  
 NMOT( ) : 800W/m<sup>2</sup>, AM1.5, 20 °C, 1m/s

/\$"1 fi

	5%	10%	15%	20%	25%
(Pmax/W)	651	682	713	744	775
(Vmpp/V)	47.42	47.42	47.42	47.42	47.42
(Impp/A)	13.73	14.39	15.04	15.70	16.35
(Voc/V)	55.99	55.99	55.99	55.99	55.99
(Isc/A)	14.43	15.11	15.80	16.49	17.18

	N	16BB
	156 (6*26)	
	2465*1134*35mm (97.05*44.65*1.38 )	
	35kg (77.2lbs.)	
	2.0mm	
	2.0mm	
	IP68, 3	
	4mm <sup>2</sup> (IEC), 1.2AWG(UL) 350mm(+), 250mm(-)	
	T01/LJQ-3-CSY/MC4/MC4-EVO2	

	1500V/DC	
	-40°C~+85°C	
	30A	
	Class	
	5400Pa	2400Pa
	80%± 5%	

Pmax	-0.29%/°C
Voc	-0.24%/°C
Isc	+0.043%/°C
NMOT	43± 2°C

	31	31(USA)
(40°HC)	496	496

∫H

TM7G78M/620W

